

DP Series Specifications

DP-10 Port Dimensions (6 GPM Max.)

Intake & discharge connection:

Polypropylene (PPG)	3/8" Female NPT
Aluminum (ADC-12)	3/8" Female NPT
Stainless Steel (316)	3/8" Female NPT

DP-15 Port Dimensions (7.4 GPM Max.)

Intake & discharge connection:

Polypropylene (PPG)	1/2" Female NPT
Groundable Acetal	1/2" Female NPT

Air Inlet/Exhaust

Air inlet (incl. ball valve):	1/4" Female NPT
Air exhaust (incl. silencer):	3/8" Female NPT

Maximum Liquid Temperature*

Diaphragm Material	Temperature
Neoprene	180°F (82°C)
Buna N	180°F (82°C)
Hytrel® (TPC-ET)	248°F (120°C)
Santoprene® (TPE)	212°F (100°C)
Viton® fluoroelastomer	248°F (120°C)
Teflon® (PTFE)	212°F (100°C)

*The maximum liquid temperature for metal and Kynar®-fitted pumps is determined by the elastomer (diaphragm material). Polypropylene and Groundable Acetal pumps have a maximum liquid temperature of 180°F (82°C) regardless of diaphragm material.

Air Supply Pressure (All Models)

20–100 PSI (1.4–7 kfg/cm)

Discharge Volume Per Cycle

DP-10: 0.020 gallons (76 cc)

DP-15: 0.025 gallons (93 cc)

Maximum Cycles Per Minute

All diaphragms: 300

Maximum Size Solid

1/32" (1 mm)

Maximum Dry Suction Lift

All diaphragms: 10-feet

Aluminum Air Motor–Standard

Optional: Epoxy-coated, Teflon®-coated, or Electroless Nickel Plate

Notes: Hytrel®-fitted pumps include Buna N check balls & wetted o-rings. Santoprene®-fitted pumps include EPDM check balls & wetted o-rings.



DP-10

Aluminum

Dimensions: 7.32" W × 9.49" H

Net Wt.: 7.9 lbs. (3.6 kg)


Shipping Wt.: 9.9 lbs.

Stainless Steel

Dimensions: 7.32" W × 9.49" H

Net Wt.: 11.7 lbs. (5.3 kg)

Shipping Wt.: 13.7 lbs.

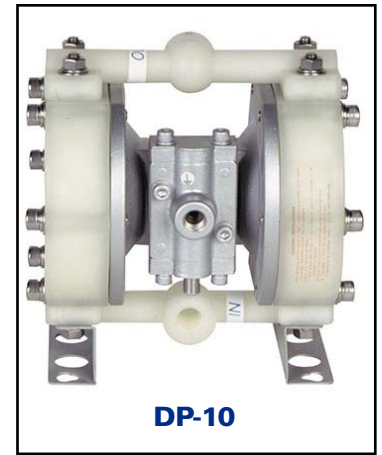


DP-10

Polypropylene

Dimensions: 7.72" W × 7.72" H

Net Wt.: 6.8 lbs. (3.1 kg)

Shipping Wt.: 8.8 lbs.

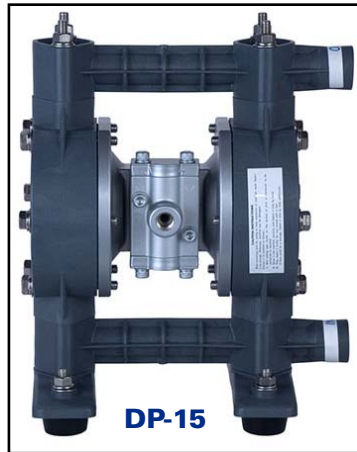


DP-15

Groundable Acetal

Dimensions: 9.68" W × 11.69" H

Net Wt.: 9 lbs. (4 kg)

Shipping Wt.: 12 lbs.

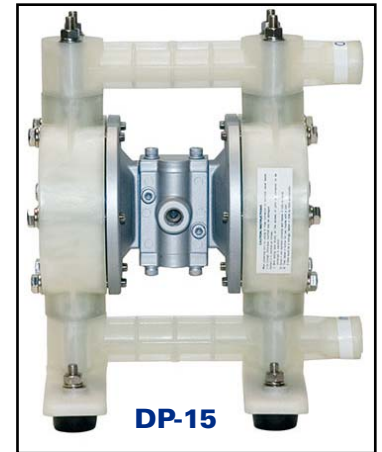

DP-15


Polypropylene

Dimensions: 9.68" W × 11.69" H

Net Wt.: 9 lbs. (4 kg)

Shipping Wt.: 12 lbs.


Model Number Nomenclature

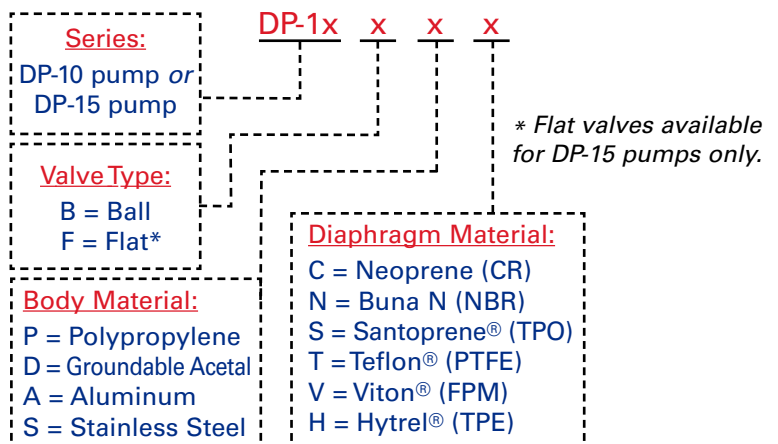

Yamada America, Inc. 955 E. Algonquin Road, Arlington Heights, IL 60005
 USA Toll-Free: 800 990-7867 Phone: 847 631-9200 Fax: 847 631-9273
 E-mail: sales@yamadapump.com Web: yamadapump.com

DP-10 Performance Curve


All Diaphragm Materials

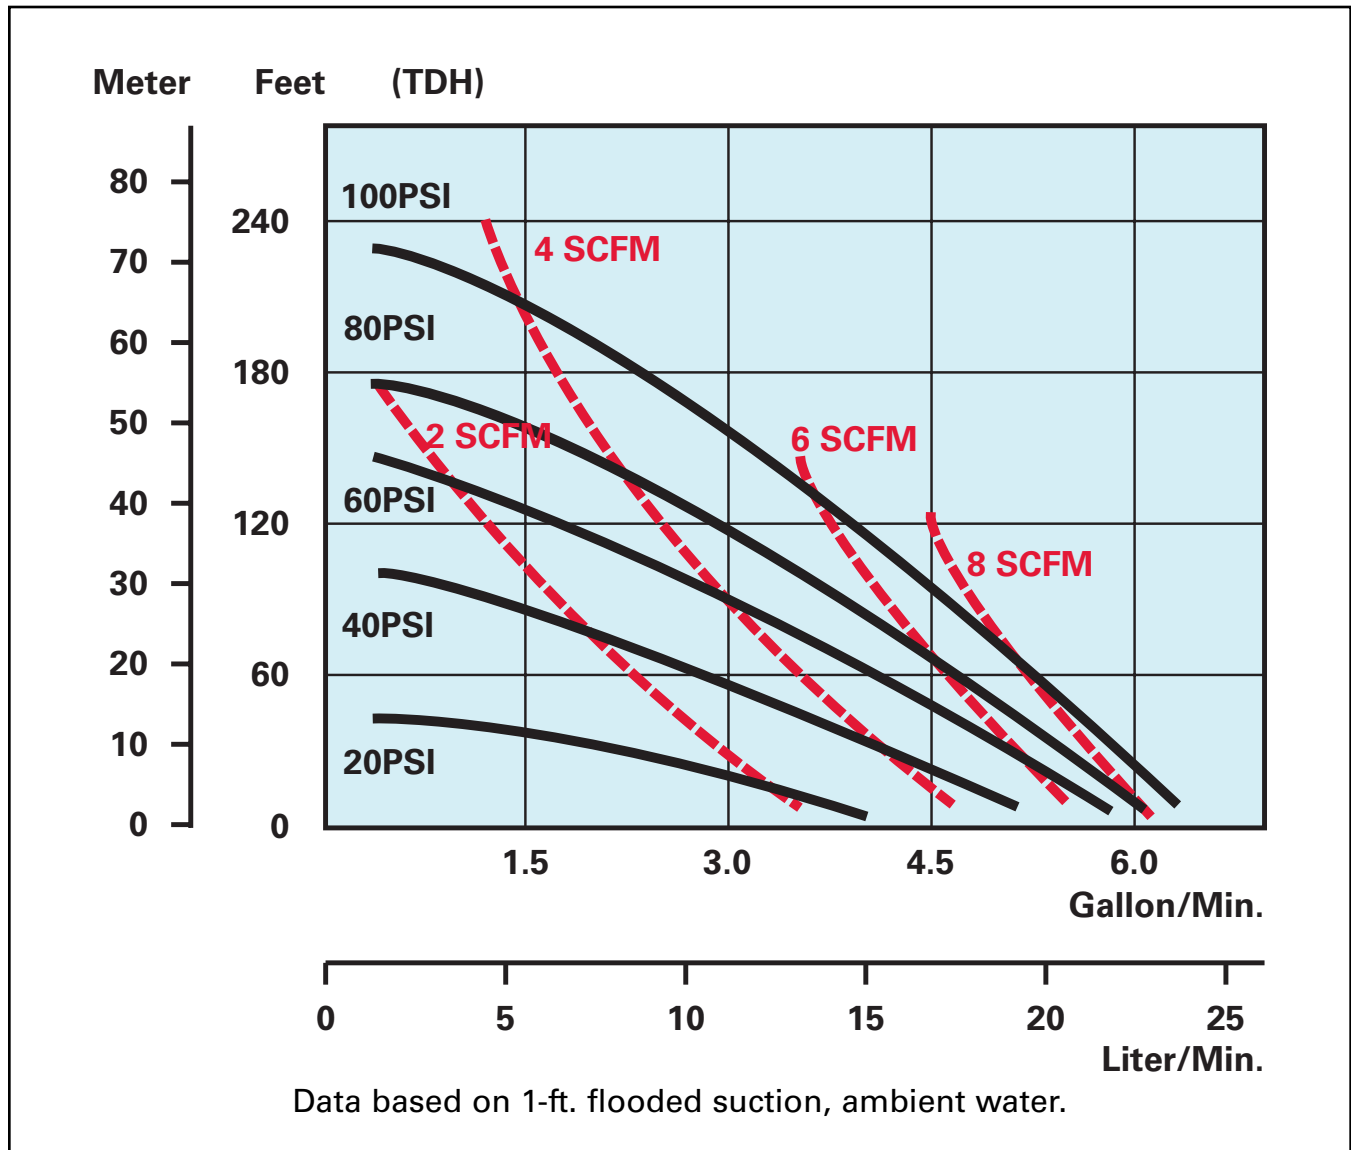


To calculate performance for Santoprene® and Hytrel®-fitted pumps, use Rubber Diaphragm Curve.

DP-15 Performance Curve

All Diaphragm Materials

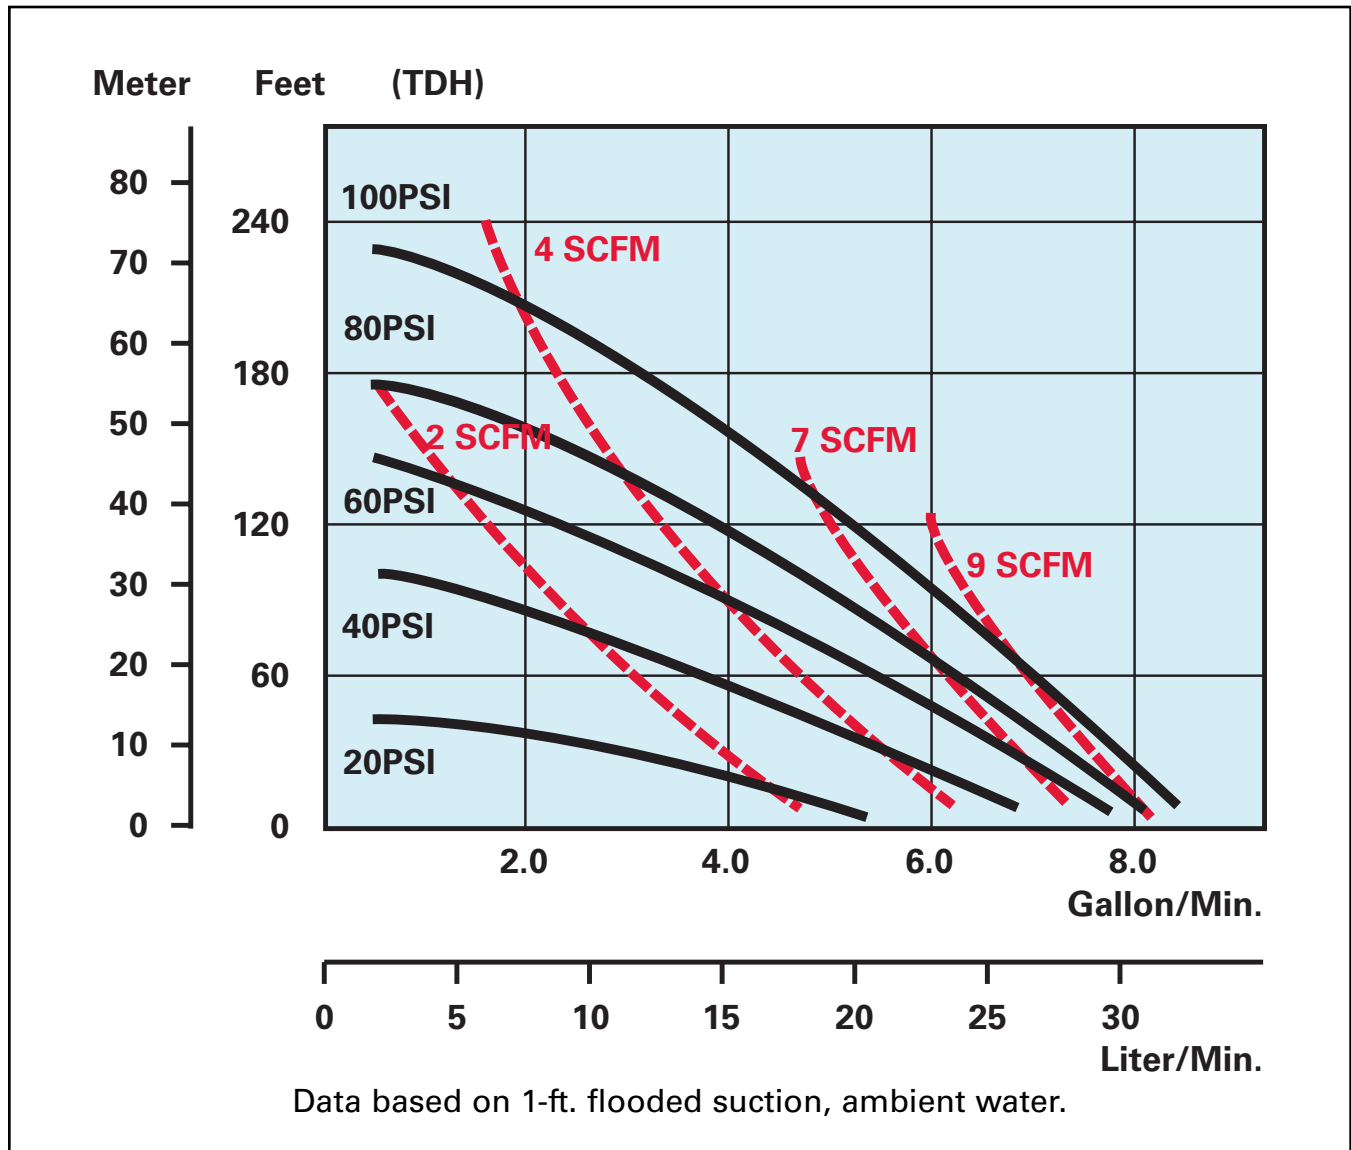

To calculate performance for Santoprene® and Hytrel®-fitted pumps, use Rubber Diaphragm Curve.

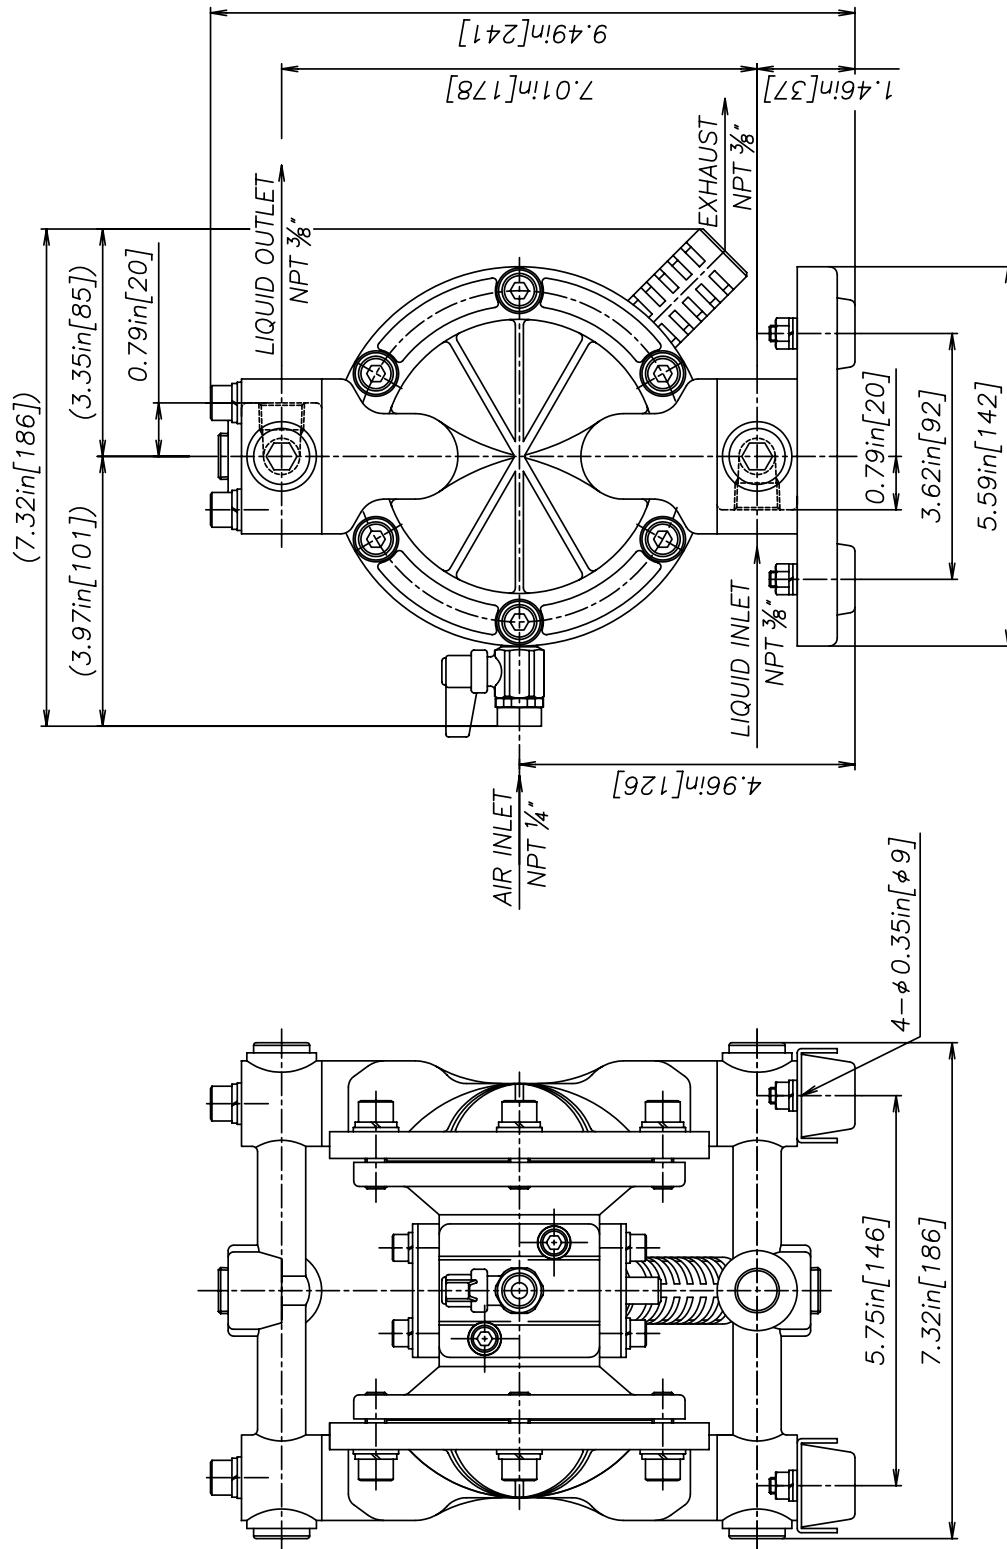


REV	DATE	DESCRIPTION	APPR'D
THE DWG.OF:			

DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 1200 NUCLEAR DRIVE - WEST CHICAGO, ILLINOIS 60185
 TOLL FREE 800-990-7867 OR 630-231-4083
 THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

SCALE	1 : 1	DRAWN BY	YJI
DATE	02/06/06	APPROVED BY	S.K.
THIRD ANG. PROJ.	DRAWING NUMBER:	DP-10BA	REV
			0

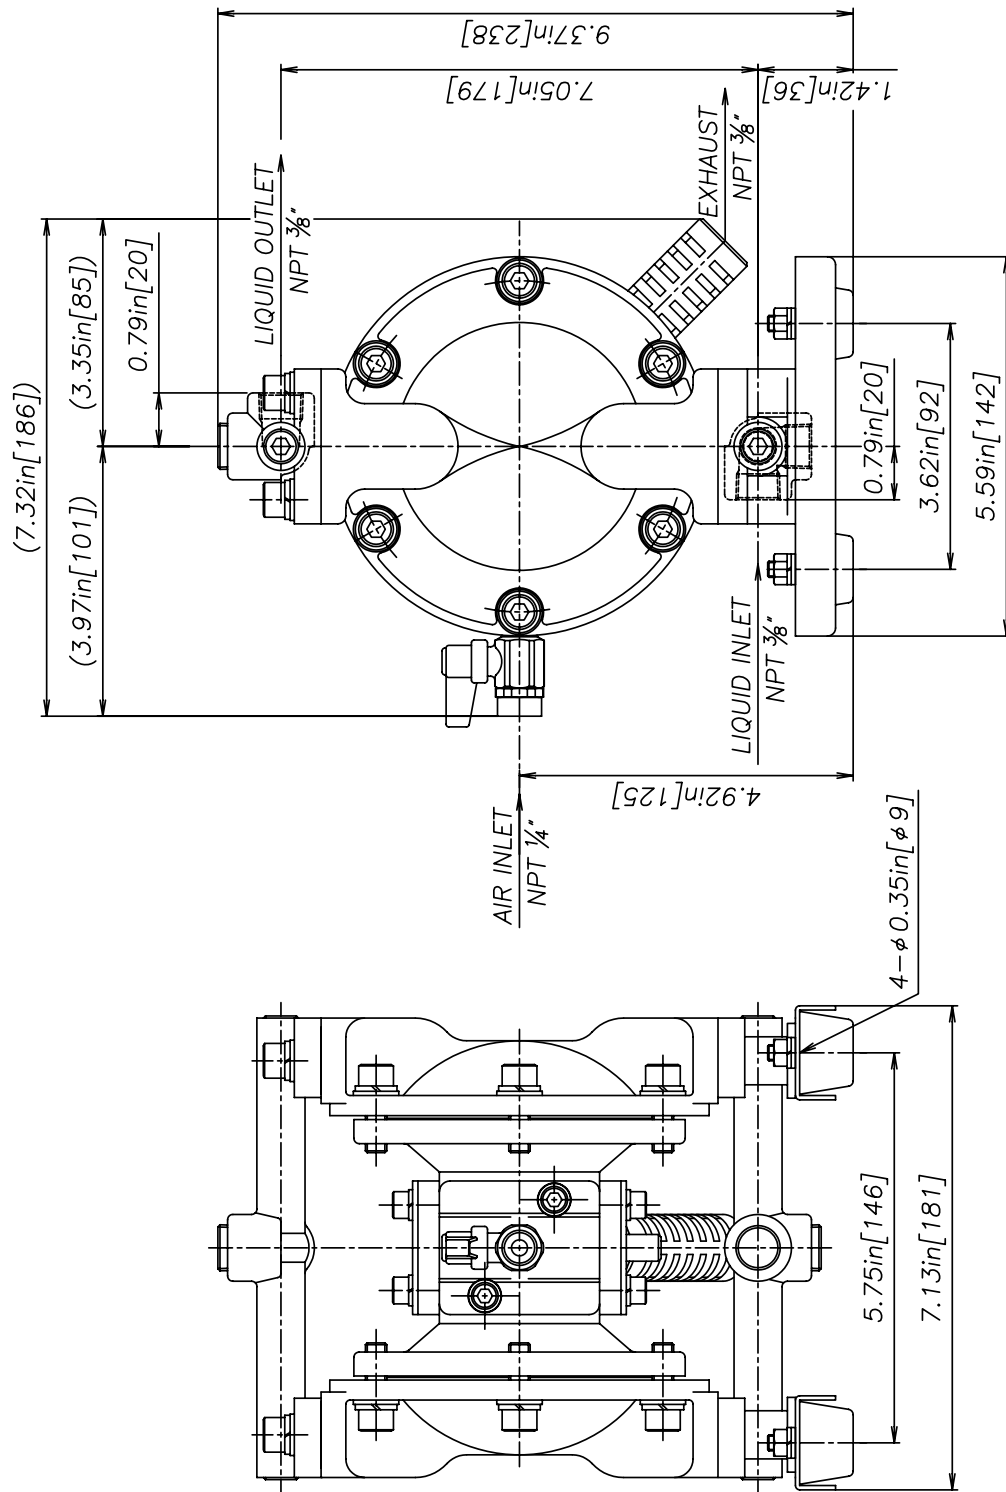

REV	DATE	DESCRIPTION	APPR'D

THE DWG.OF:


DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 1200 NUCLEAR DRIVE - WEST CHICAGO, ILLINOIS 60185
 TOLL FREE 800-990-7867 OR 630-231-4083

SCALE 1 : 1
 DATE 02/06/06
 DRAWN BY YJL
 APPROVED BY S.K.

THIRD ANG. PROJ.
 DRAWING NUMBER: DP-10BS
 REV 0

THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

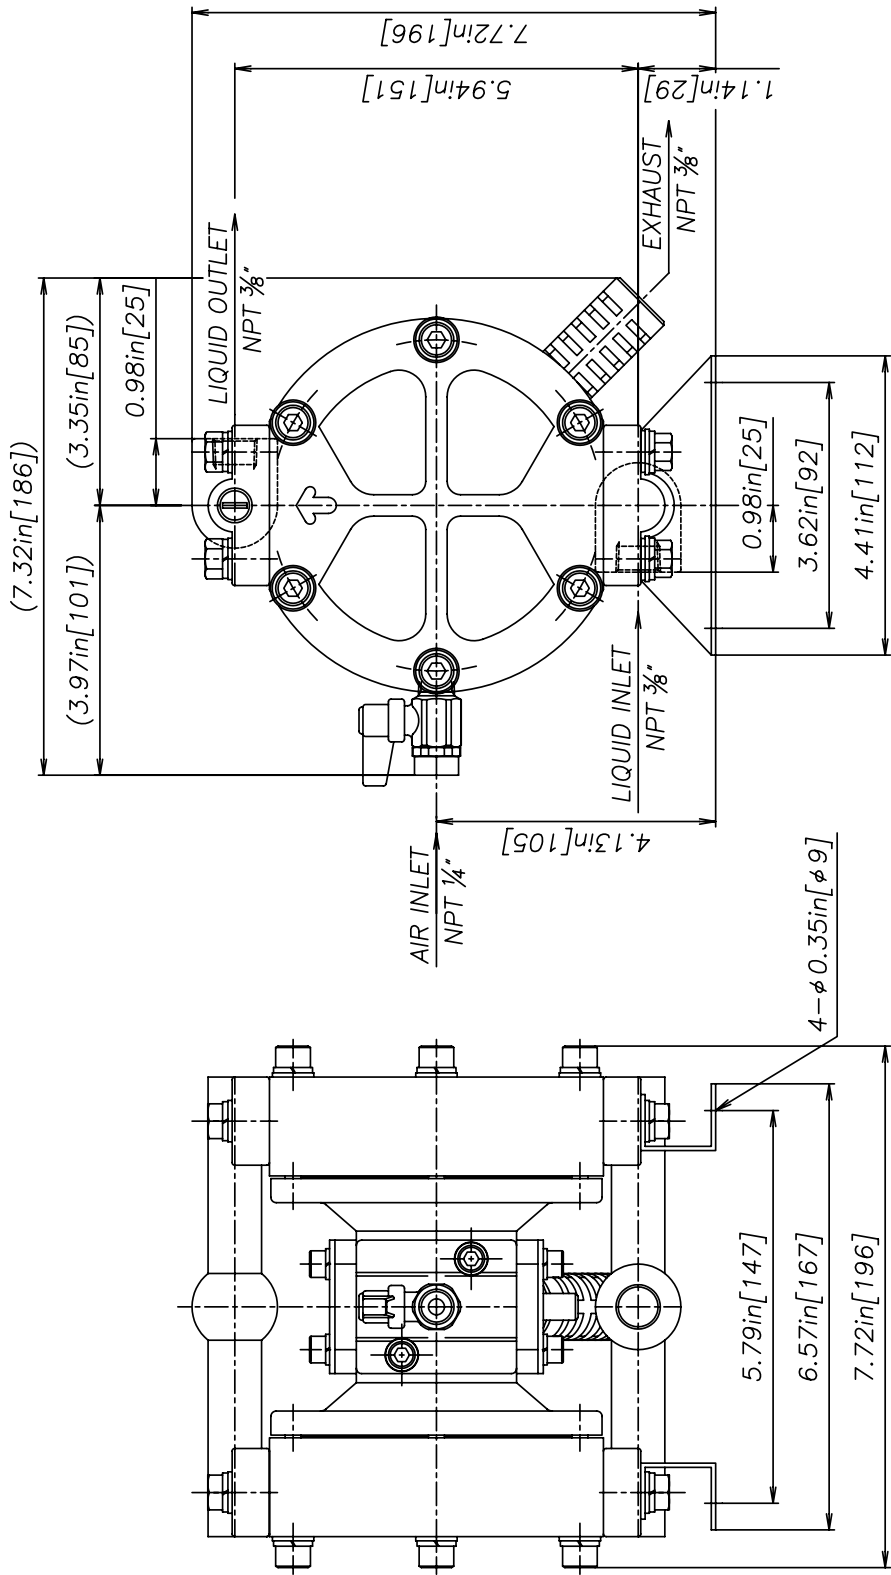

REV	DATE	DESCRIPTION	APPR'D
THE DWG.OF:			


DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 1200 NUCLEAR DRIVE - WEST CHICAGO, ILLINOIS 60185
 TOLL FREE 800-990-7867 OR 630-231-4083

SCALE 1 : 1
 DATE 02/06/06
 DRAWN BY YJL
 APPROVED BY S.K.

THIRD ANG. PROJ.
 DRAWING NUMBER: DP-10BP
 REV 0

THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

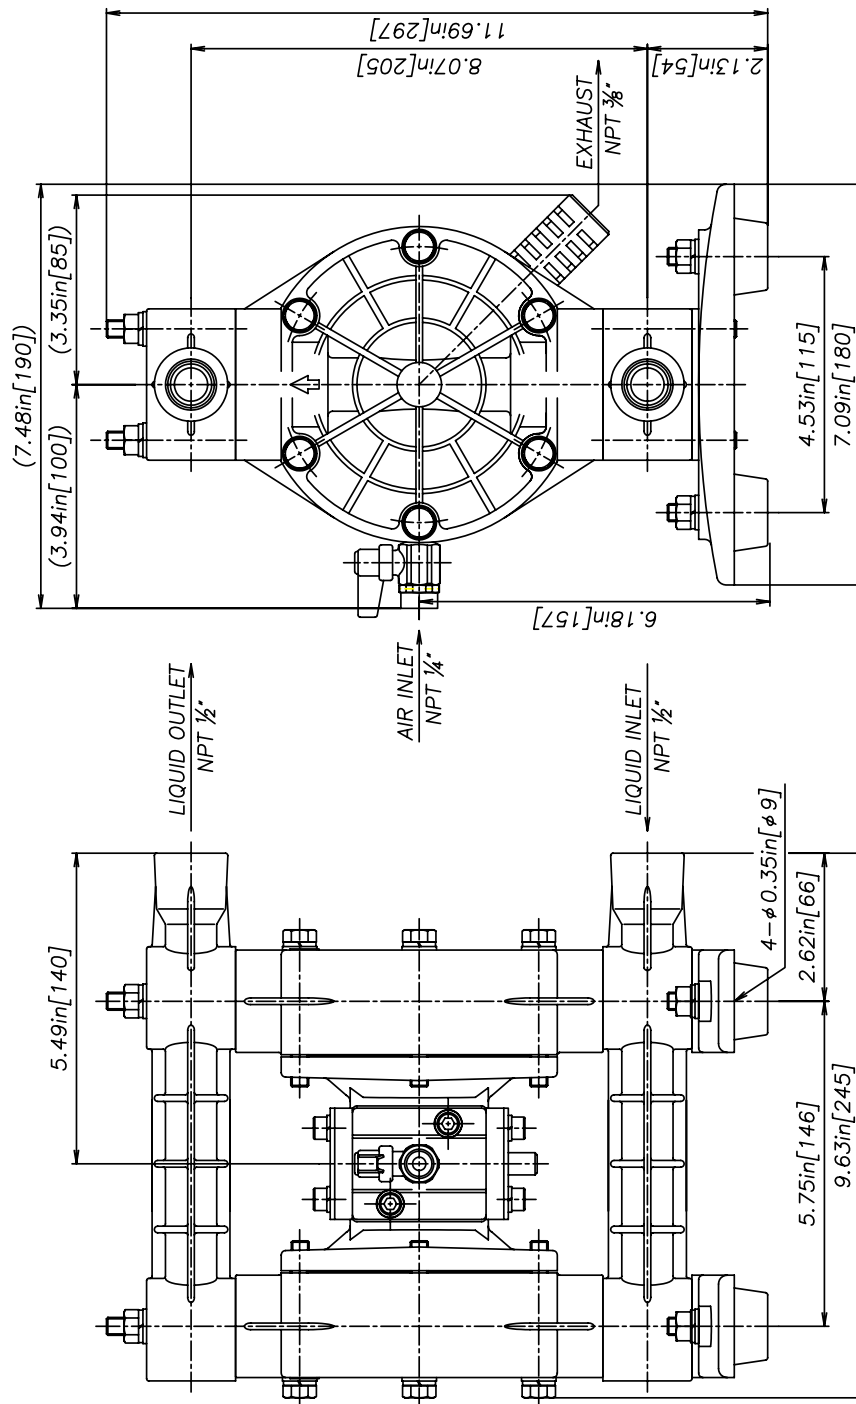

REV	DATE	DESCRIPTION	APPR'D

THE DWG.OF:

DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 1200 NUCLEAR DRIVE - WEST CHICAGO, ILLINOIS 60185
 TOLL FREE 800-990-7867 OR 630-231-4083
 THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

SCALE 1 : 1
 DATE 02/10/06
 DRAWN BY YJJ
 APPROVED BY S.K.

THIRD ANG.PROJ.
 DRAWING NUMBER:
 DP-15F/B PLASTIC
 REV 0

AutoCAD® is a registered trademark of Autodesk, Inc.

Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.

Kynar® is a registered trademark of Arkema.

Nordel™ is a trademark of DuPont Dow Elastomers.

Ryton® is a registered trademark of Chevron Phillips Chemical Company.

Santoprene® is a registered trademark of Advanced Elastomer Systems.

Swagelok® & VCR® are trademarks of the Swagelok Companies.

Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.

Viton® is a registered trademark of DuPont Performance Elastomers.

Due to Yamada's continued commitment to product improvement, specifications may change without notice.



Yamada America, Inc. 955 E. Algonquin Road, Arlington Heights, IL 60005
USA Toll-Free: 800 990-7867 Phone: 847 631-9200 Fax: 847 631-9273
E-mail: sales@yamadapump.com Web: yamadapump.com